

CONNECTION	SIGNAL	DESCRIPTION
J1 +	PWR	This pin should be connected to the positive output of the driver power supply. The maximum voltage applied should not exceed +50 VDC.
J1 -	GND	This pin should be connected to the negative output of the driver power supply.
J2 +	PWR	This pin should be connected to one terminal of the solenoid.
J2 -	SOL1	This pin should be connected to the other terminal of the solenoid.

Load on-off Cyclor Module Pin Assignment and Description




Optimal Engineering Systems, Inc.
 6901 Woodley Avenue
 Van Nuys, California 91406 U.S.A.
www.oesincorp.com

+1 (818) 222-9200
 FAX +1 (818) 436-0446
 E-mail slaes@oesincorp.com

Warning:

Handling the Load On-Off Power Cycling module shall be performed in a static safe environment while a ground strap is used. Damages arising due to not observing the static precautions shall void the limited ninety-day warranty.

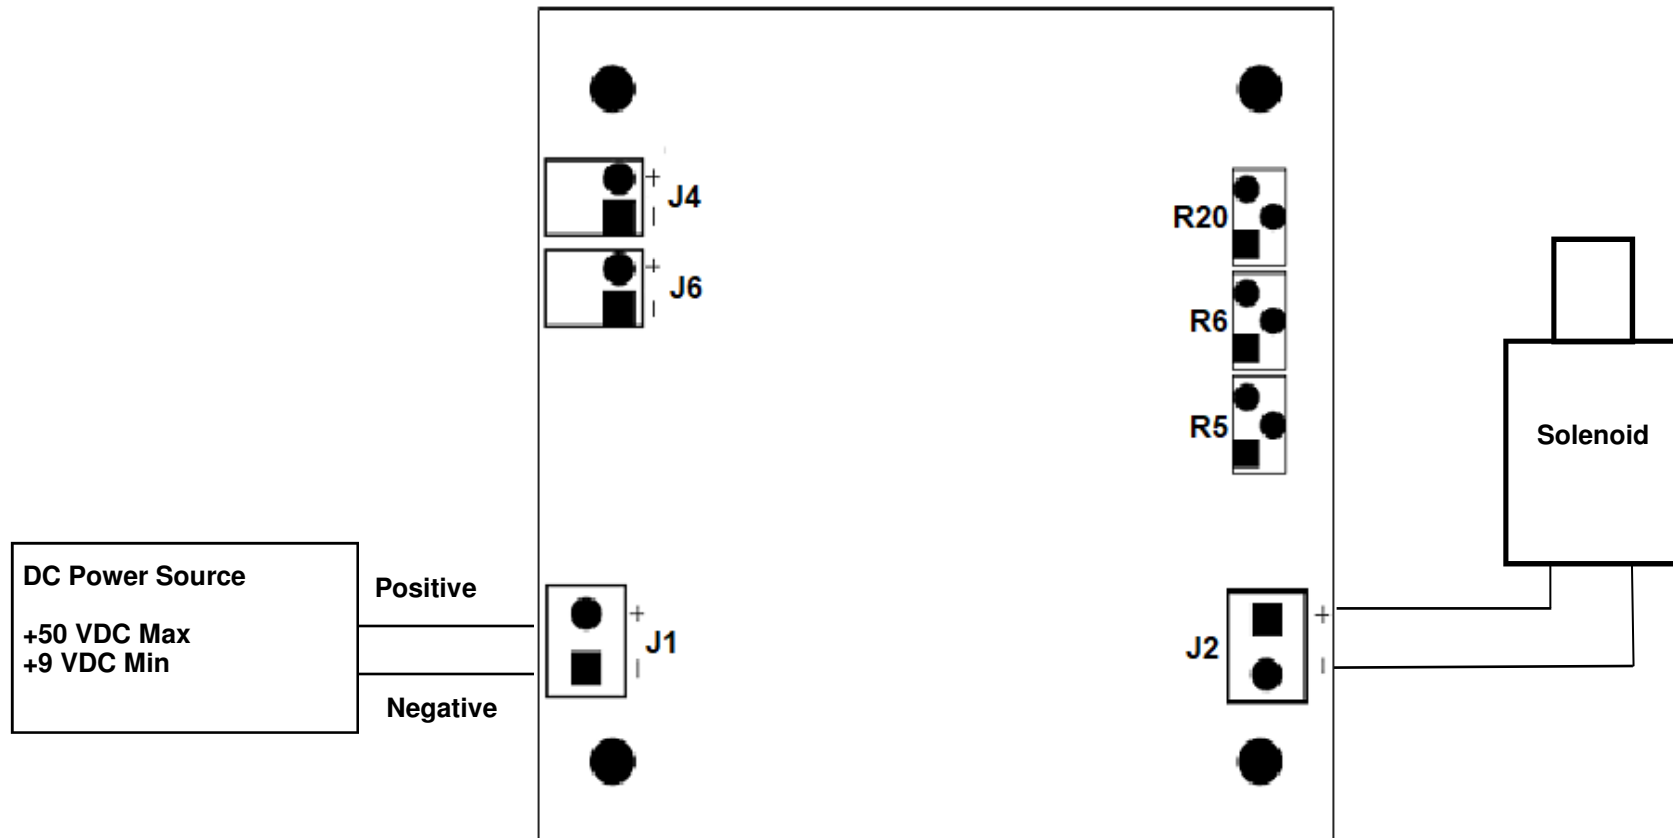

LOC - 01 Wiring Diagram



Optimal Engineering Systems, Inc.
6901 Woodley Avenue
Van Nuys, California 91406 U.S.A.
www.oesincorp.com

+1 (818) 222-9200
FAX +1 (818) 436-0446
E-mail slaes@oesincorp.com


Frequency, Duty Cycle and Applied Voltage Adjustments

The R5 potentiometer adjusts the applied voltage. Turning the R5 potentiometer CW will increase the applied voltage across the device.

The R6 potentiometer adjusts the frequency of actuation. Turning the R6 potentiometer CW will increase the frequency.

The R20 potentiometer adjusts the duty cycle. Turning the R20 potentiometer CCW will increase the duty cycle.

The onboard LED turns on when the solenoid is energized. This LED can be used to visually adjust the R6 potentiometer.

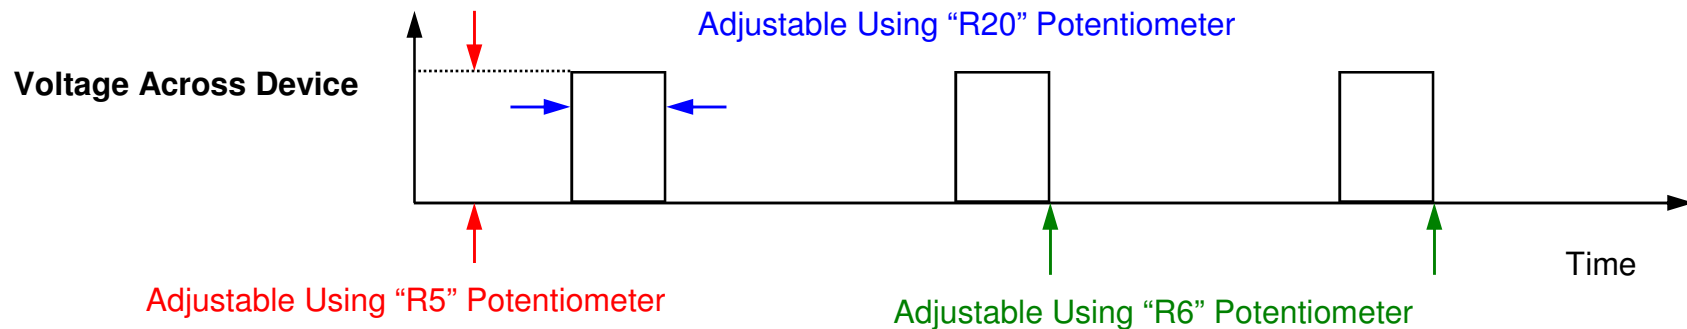

Optimal Engineering Systems, Inc.
6901 Woodley Avenue
Van Nuys, California 91406 U.S.A.
www.oesincorp.com

+1 (818) 222-9200
FAX +1 (818) 436-0446
E-mail slaes@oesincorp.com

Limitation of Liability

Optimal Engineering Systems, Inc. (OES) hardware and software are not intended for use in any manner where human life or safety is at risk. OES' products are not intended for life support equipment.

In no event shall Optimal Engineering Systems, Inc. be liable to any customer for costs or damages, including lost profits, lost savings or other incidental or consequential damages arising out of the use or inability to use such products even if Optimal Engineering Systems, Inc. or an authorized Optimal Engineering Systems, Inc. representative has been advised of the possibility of such damages, or for any claim by any other party. In any event, Optimal Engineering Systems liability arising in any manner in connection with the products, whether based in contract, product liability or tort, shall not exceed the purchase price of the product.

Limited Ninety-Day Warranty

Optimal Engineering Systems, Inc. warrants to the original purchaser that this product to be free from defects in material or workmanship for a period of ninety days from date of purchase. Optimal Engineering Systems, Inc. agrees to repair any such defect or exchange the product with a new or equal replacement. Defective product must be returned to Optimal Engineering Systems, Inc. postpaid. This warranty is void for any product that has been modified by the customer in any way. If failure of the Product has resulted from accident, abuse, or miss-application, Optimal Engineering Systems, Inc. shall have no responsibility under this Ninety-day Warranty.



Optimal Engineering Systems, Inc.
6901 Woodley Avenue
Van Nuys, California 91406 U.S.A.
www.oesincorp.com

+1 (818) 222-9200
FAX +1 (818) 436-0446
E-mail slaes@oesincorp.com